


IT'S ALL ABOUT CLEANER AIR & LONGER ENGINE LIFE!



turbo® III Precleaners

AVAILABLE IN	CFM	M3/Min
T3 - 2"	15-75	0.42 - 2.12
T3 - 3"	50-250	1.42 - 7.08
T3 - 4"	50-250	1.42 - 7.08
T3 - 4.5"	160-500	5.66 - 14.16

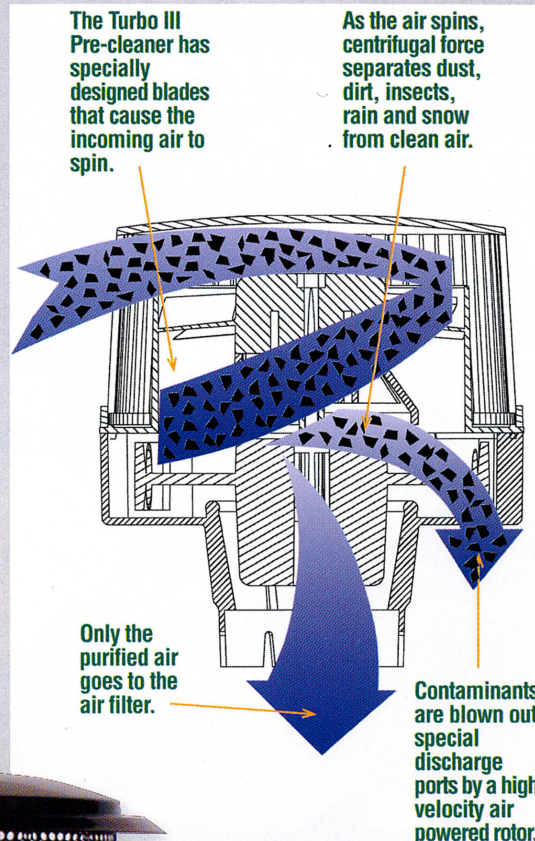

turbo® II Precleaners

AVAILABLE IN	CFM	M3/Min
MD 13	50-100	1.42 - 2.83
MD 24*	100-250	2.83 - 7.08
MD 35*	250-350	7.08 - 9.91
MD 46*	350-700	9.91 - 19.82
MD 68*	700-1100	19.82-31.15

*Also available in various inlet sizes

- Only the purified air goes to the air filter.
- As the air spins, centrifugal force separates dust and snow from clean air.
- Contaminants are blown out special discharge ports by a high velocity, air powered rotor.



Area Diesel Service, Inc.

1300 N University St. Carlinville, IL 62626

(800)637-2658

1140 N.E. 56th St. Pleasant Hill, IA 50327

(800)237-4692

www.arediesel.com